SL26RTE/SL30RTE

ELECTRIC SPEED LEVEL



- Lithium-ion electric Speed Level sigma lift
- Quiet and clean zero emissions
- Fully charged in 5-8 hours
- Climbs gradients of up to 50%
- Auto-levelling without the need for stabilizers



ELECTRIC SPEED LEVEL

SL26RTE/SL30RTE


DIMENSIONS	SL26RTE	SL30RTE
Max. working height	10.0m	11.0m
Max. platform height (A)	8.0m	9.0m
Platform size (stowed)	1.72m x 3.66m	1.72m x 4.23m
Platform size (extended) (E)	1.72m x 4.6m	n/a
Extension deck length	0.91m	n/a
Overall width (D)	2.13m	2.13m
Overall length (C)	3.79m	4.3m
Stowed height (B)	2.6m	2.6m
Min. height (guardrails folded)	1.7m	1.7m
Chassis ground clearance	305mm	305mm
Axle ground clearance	195mm	195mm


PERFORMANCE			
Platform capacity (SWL)	680kg	590kg	
Max. wind speed	12.5m/s	12.5m/s	
Max. drive height	8.0m	9.0m	
Max. drive speed (stowed)	5.4 km/h	5.4 km/h	
Max. drive speed (elevated)	0.8km/h	0.8km/h	
Raise/lower time	21/32 sec	conds 24/36 seconds	
Gradeability	50%	50%	
Max. levelling, front to rear	9°	9°	
Max. levelling, side to side	13°	13°	
Inside turning radius	3.9m	3.9m	
Outside turning radius	5.64m	5.64m	
Tyres	26 x 12.00 - 12 foam filled		
Controls	digital proportional joystick		
Drive system	4 wheel drive with hydraulic motors and flow dividers		

POWER			
Power source	Li-ion batteries with integrated BMS		
Operating temperature	(-)25°C to (+)60°C	(-)25°C to (+)60°C	
Charger	high frequency smart on-board 50A battery charger		

MOTOR			
Motor	AC ele	AC electric motor	
WEIGHT			
Weight	3,500kg	3,450kg	

LEVELING CAPABILITIES

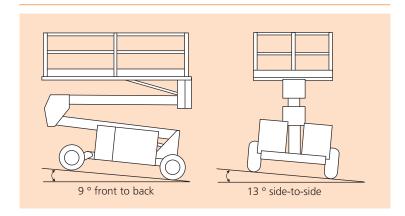



STANDARD FEATURES

- Two lithium-ion battery systems 11.5kWh
- Automatic powered platform levelling
- Powerful 4 wheel drive
- Oscillating front axle
- High grip, open tread deck (SL30RTE only)
- Roll-out deck extension (SL26RTE only)
- Descent alarm
- High grip non-marking all terrain tyres
- Digital proportional controls
- Power line to platform
- Fold-down guardrails
- All motion alarm
- Hour meter & on-board diagnostics display
- Flashing amber light
- 2000 charging cycles / 2 year* lithium battery warranty
- 2 year parts & labour, 5 year structural warranty

OPTIONS

- Special paint colours
- Environmental hydraulic oil
- Additional 5.75kWh battery system
- Tunnel package (23kWh)
- Work light package
- Driving light package
- Extreme environment package



Vigo Centre, Birtley Road, Washington, Tyne & Wear, NE38 9DA, U.K.

t: +44 (0) 845 1550 057 e: sales.emea@snorkellifts.com